



Model: WS RETROFIT FOR IPAD PRO 12.9 5th
BLACK / WHITE / UNPAINTED

Model No.: 002-1-858-BL / -WH / -WO

Family: WALL-SMART

DWG NO. 002-4-858-SPC

PRODUCT SPEC.

REVISION A

DATE 27/APR/2021



Make Your Wall Smart

“WS RETROFIT FOR IPAD PRO 12.9 5th” - Product description:

The “WS RETROFIT FOR IPAD PRO 12.9 5th” is an adapter for in-wall nearly flush retrofit installation of iPad Pro 12.9” 5th Gen.

The “WS RETROFIT FOR IPAD PRO 12.9 5th” firmly mounts the iPad while allowing easy insertion, removal and operation.



Key features and benefits:

- Nearly flush with the wall (4mm [0.16”] thick on-wall bezel).
- Wall mount may be mounted in any orientation.
- Designed for the use with iPad Pro 12.9” 5th Gen (by Apple) (iPad is not included).
- Adapter kit contains:
 1. (X1) Wall adapter;
 2. (X1) Bezel;
 3. (X1) USB-C / USB-C 90deg adaptor;
- The bezel is supplied painted black (-BL), white (-WH) or unpainted (-WO).

Key properties:

- Dimensions: (W/H/D): 347.5mm (13.68”)/ 268.8mm (10.58”)/ 42.6mm (1.68”)
- Power Supply: Wall mount includes POE to USB-C converter. The installer should connect the wall mount to an IEEE 802.3at POE+ power source via CAT6 cable and RJ45 connector. (Please verify the POE+ power source can supply 25.5W)
- Weight: 2.8Kg, 6.16lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI)

iPad® is a trademark of Apple Inc., registered in the U.S. and other countries.

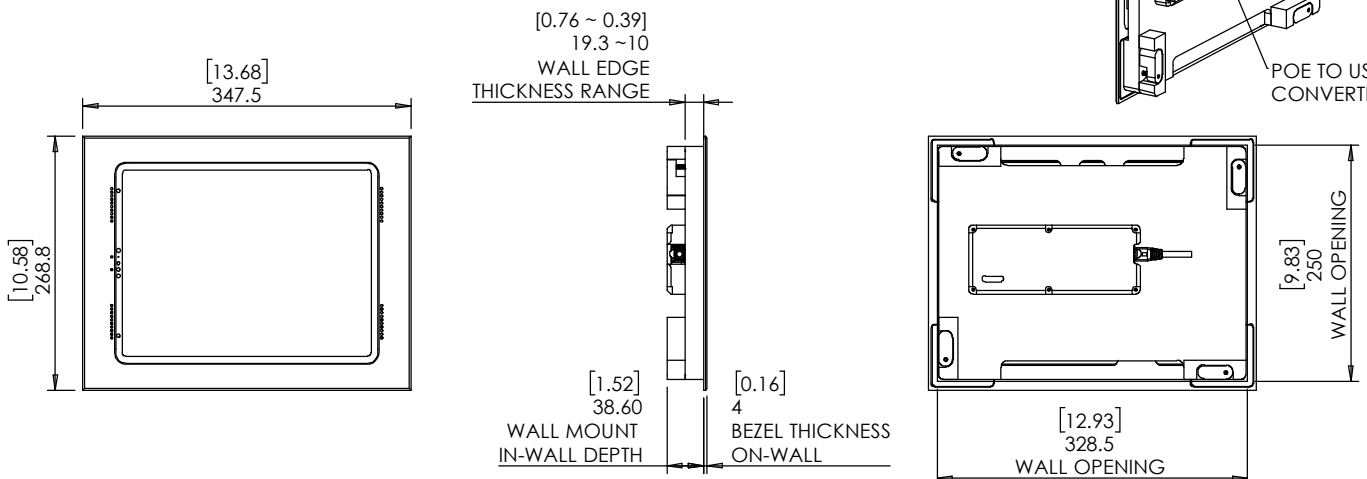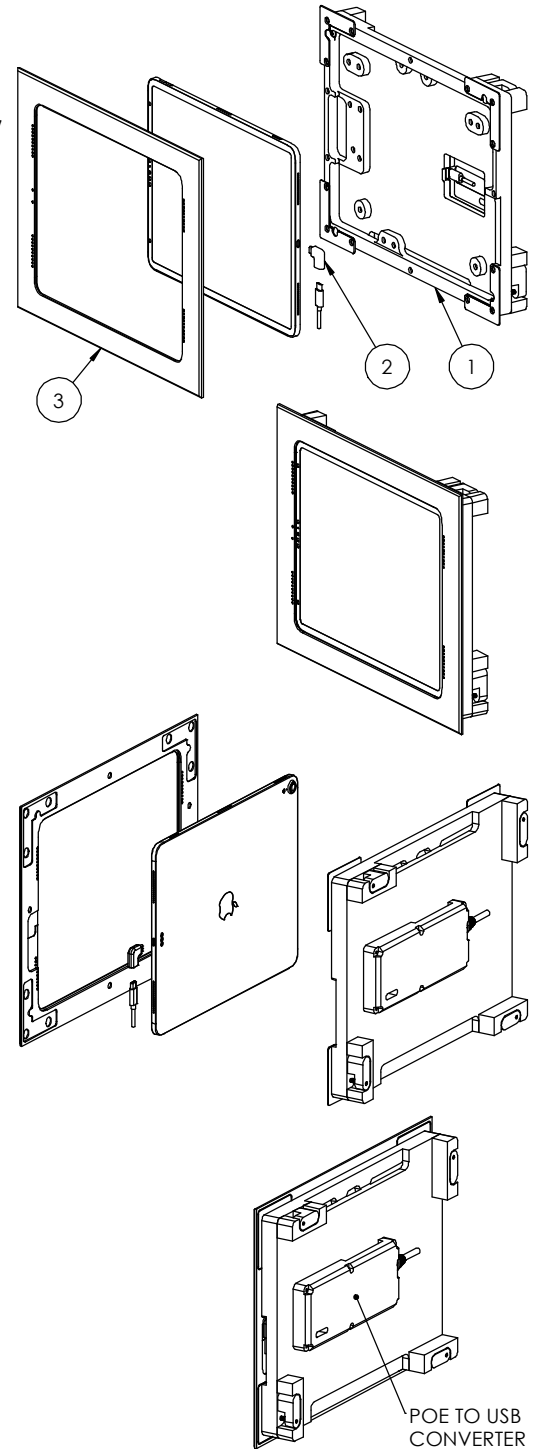




Model: WS RETROFIT FOR IPAD PRO 12.9 5th
BLACK / WHITE / UNPAINTED

Family: WALL-SMART
DWG NO. 002-4-858-SPC





Model No.: 002-1-858-BL / -WH / -WO

PRODUCT SPEC.
REVISION A
DATE 27/APR/2021


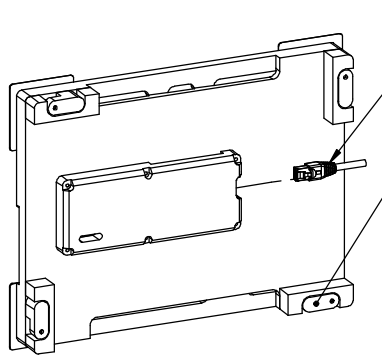


Before installation of the wall mount, connect a 48V IEEE 802.3at POE+ power source via a CAT6 cable and RJ45 connector to the POE to USB converter.



Board thickness 10mm[0.39"] up to 21mm[0.83"].
For boards up to 32mm[1.25"] thick, reinstall cam latches upside down

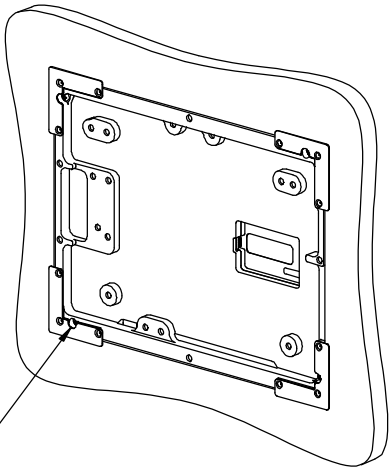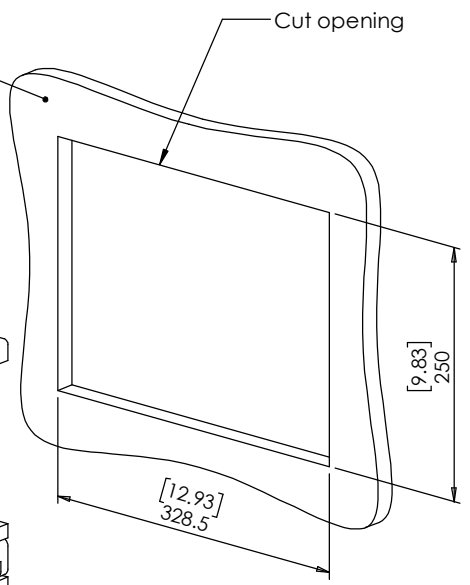

Insert wall mount and gently screw clockwise 4 retention screws until the cam latches retain the unit.

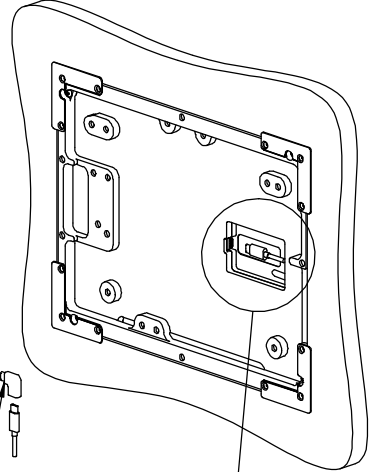

Connect USB-C/USB-C 90° adaptor and the iPad USC-C cable to the iPad

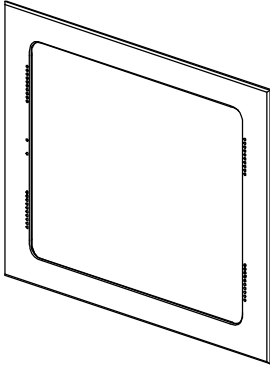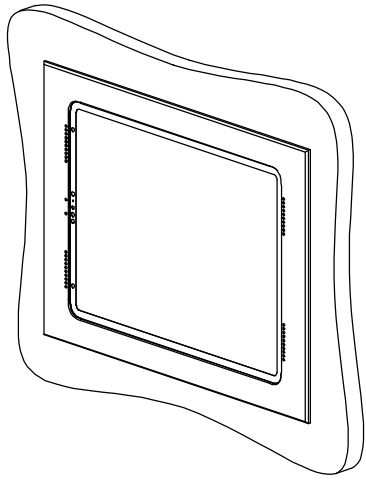

Connect iPad USB-C cable to POE to USB converter

Hide excess cable in the cable-slit

