



Model: WS RETROFIT FOR INTELLITHINGS ROOMME

Family: WALL-SMART

DWG NO. 082-4-869-SPC



Model No.: 082-1-869

PRODUCT SPEC.

REVISION A

DATE 13/APR/2021

Make Your Wall Smart


“WS RETROFIT FOR INTELLITHINGS ROOMME” - Product description:

The “WS RETROFIT FOR INTELLITHINGS ROOMME” is an adapter for in-ceiling nearly flush retrofit installation of an INTELLITHINGS RoomMe sensor.

The “WS RETROFIT FOR INTELLITHINGS ROOMME” firmly mounts the sensor while allowing easy insertion and removal.


Key features and benefits:

- Nearly flush with the ceiling (4mm [0.16"] thick on-wall bezel).
- Allows easy insertion and removal of the sensor.
- Ceiling board thickness 10mm [0.39"] up to 22mm [0.86"].
- Bezel attaches magnetically to the retrofit mount base.
- The bezel is supplied painted matte white.
- Designed for the use with INTELLITHINGS RoomMe sensor (not included).
- Adapter kit contains:
 1. (X1) Wall mount base;
 2. (X1) Bezel;
 3. (X1) Sensor adapter
 4. (X4) M4 nuts;
 5. (X4) M4x12 Screws;

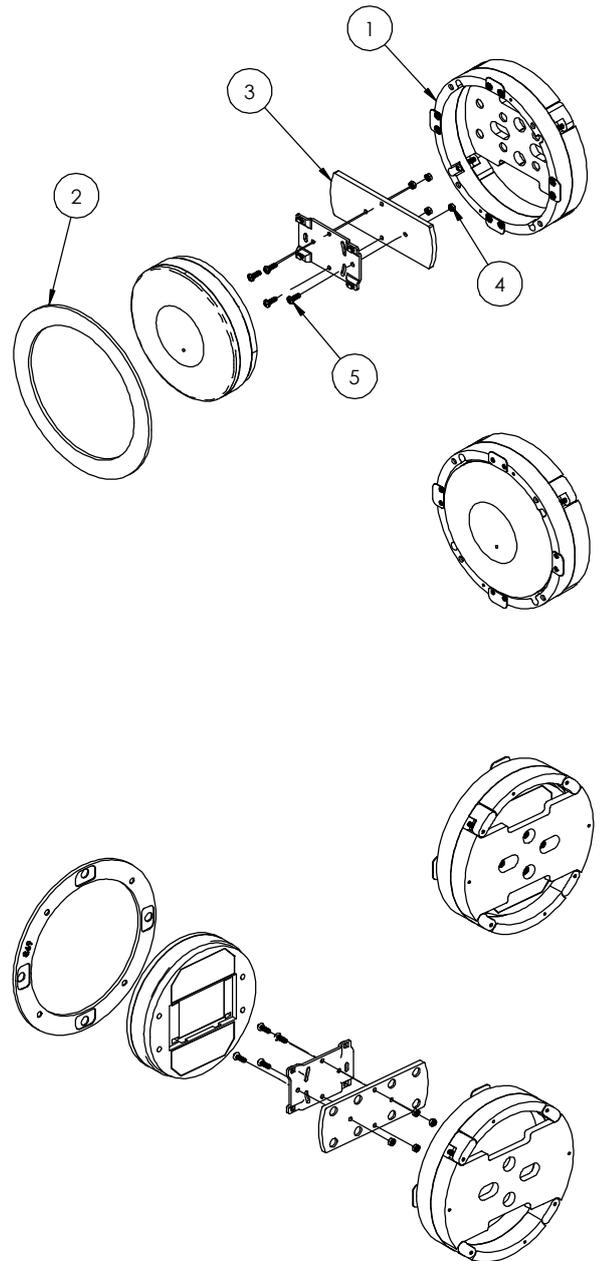

Key properties:

- Dimensions: (W/H/D): 201mm (7.91")/ 201mm (7.91")/ 48.1mm (1.89")
- Weight: 0.5Kg, 1.1lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI)

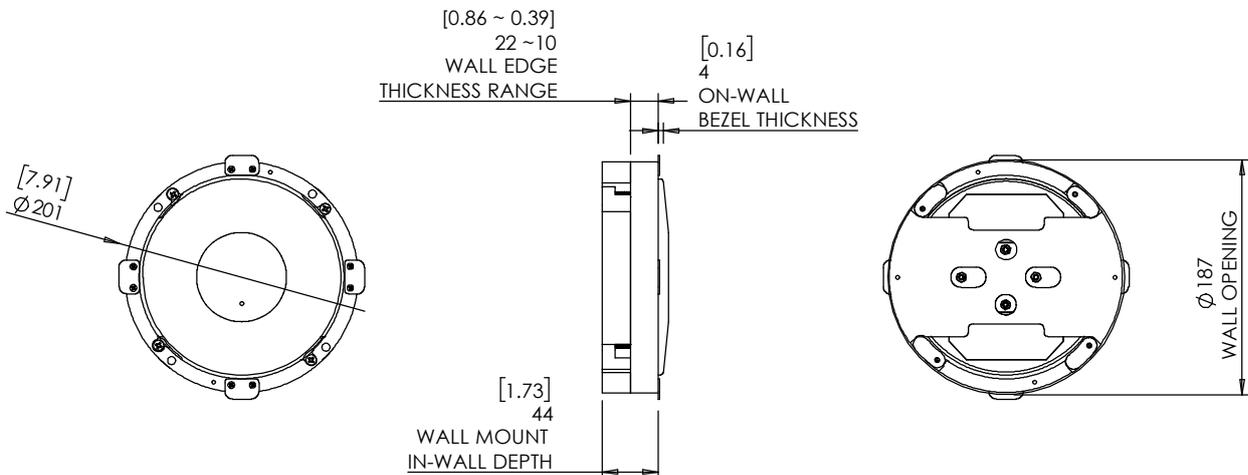



[7.36]
TRUE Ø187

1. CUT OPENING - BOARD THICKNESS 10mm [0.39"]
UP TO 22mm [0.86"]
USE PAGE 3 FOR ROUTING TEMPLATE

2. ROUTE NECESSARY CABLES

3. INSERT WALL MOUNT BASE

4. GENTLY SCREW CLOCKWISE 4
RETENTION SCREWS UNTIL CAM
LATCHES RETAIN THE UNIT.

5. SCREW SENSOR ADAPTER TO
BACK PLATE AND RECONNECT
THEM TO THE SENSOR

6. ATTACH SENSOR

7. ATTACH BEZEL
(MAGNETICALLY)

TO REMOVE SENSOR DEATTACH
BEZEL AND PUSH HERE



Model: WS RETROFIT FOR INTELLITHINGS ROOMME

Family: WALL-SMART

DWG NO. 082-4-869-SPC



Model No.: 082-1-869

PRODUCT SPEC.


REVISION A

DATE 13/APR/2021

CUTOUT ROUTING TEMPLATE

082-1-869

SCALE 1:1

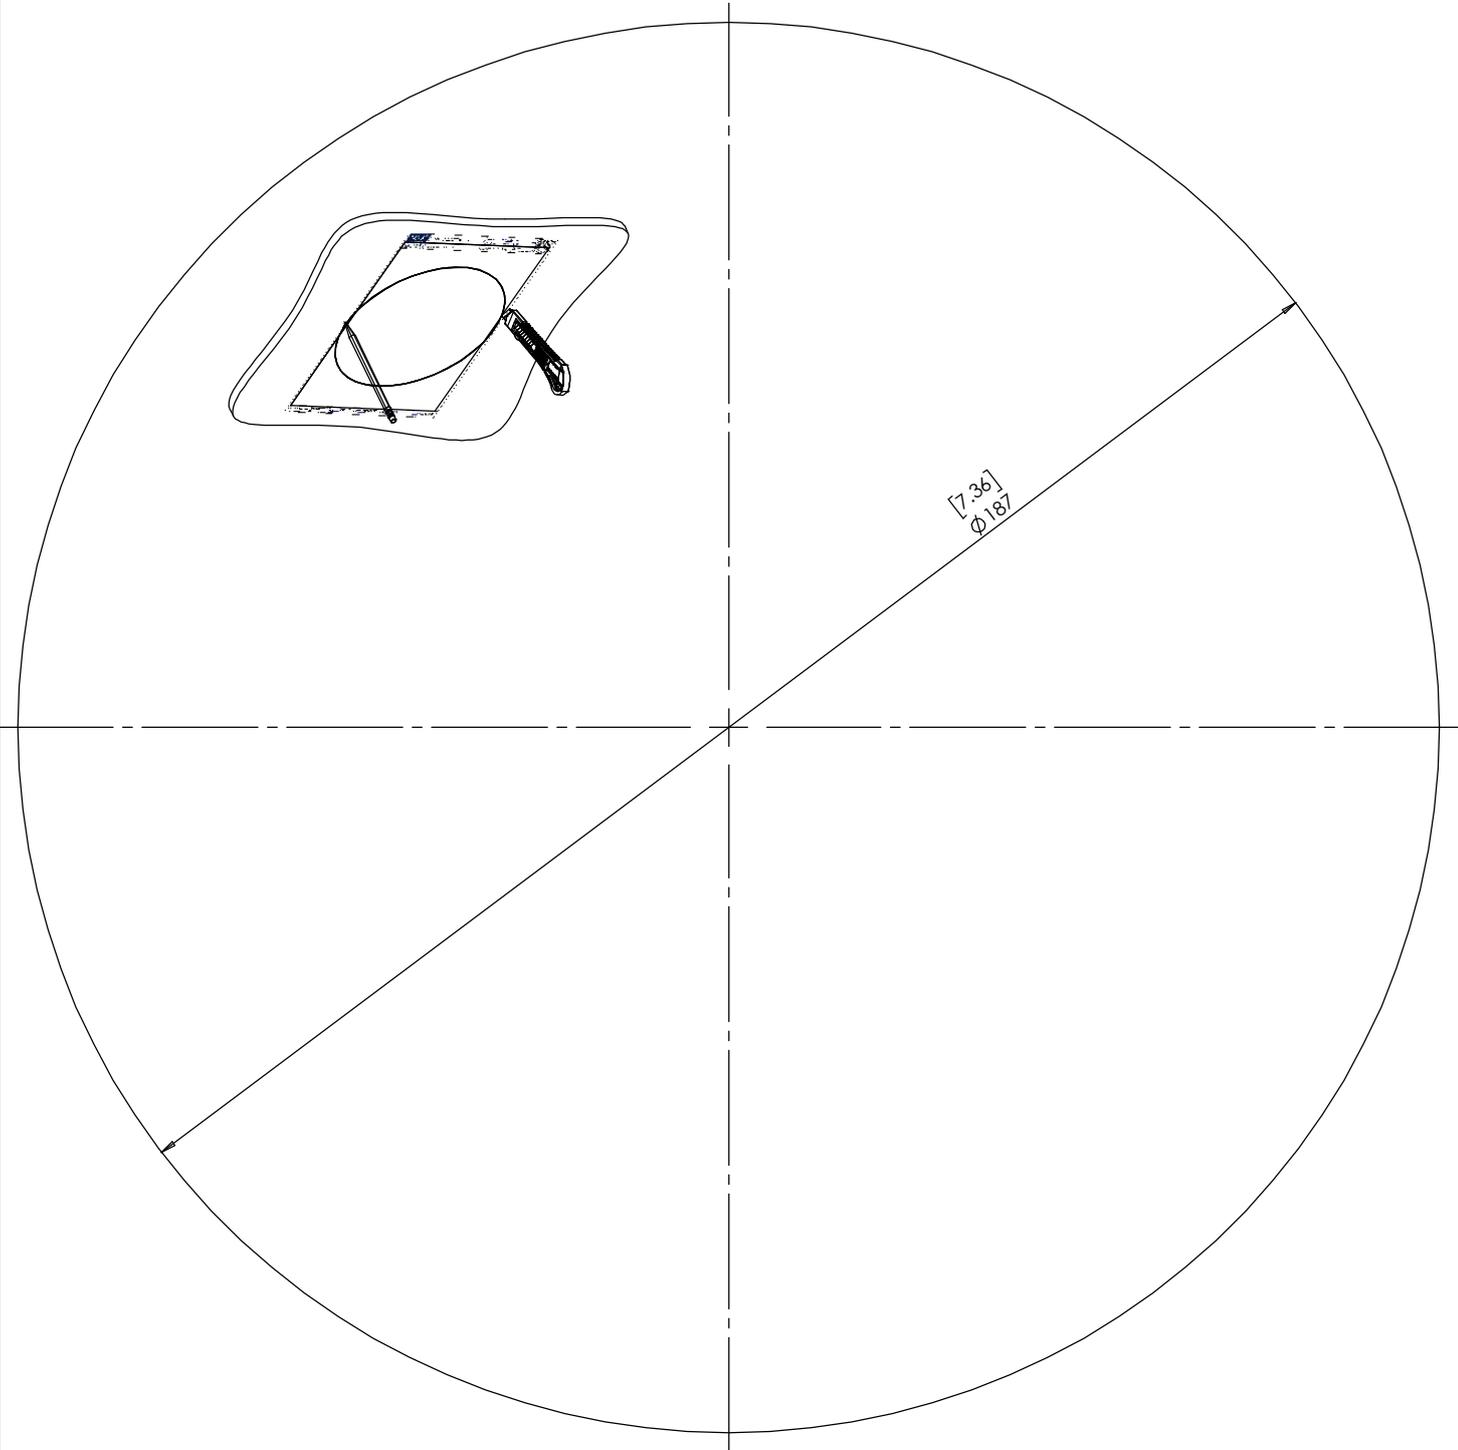

PRINT THIS PAGE 1:1 SCALE