



Model: WS SB FOR CRESTRON HZ2-FP-G4

Family: WALL-SMART

DWG NO. 012-4-763-SPC



Model No.: 012-1-763

PRODUCT SPEC.

REVISION B

DATE 27/AUG./2023

### Make Your Wall Smart

#### “WS SB FOR CRESTRON HZ2-FP-G4” - Product description:

The “WS SB FOR CRESTRON HZ2-FP-G4” is an adapter for in-wall flush installation of an HZ2-FP-G4 faceplate with **low voltage** Horizon™ devices in solid board walls.

The “WS SB FOR CRESTRON HZ2-FP-G4” firmly mounts the faceplate and the devices while allowing easy access, insertion and removal.

#### FOR LOW VOLTAGE USE ONLY!

#### Key features and benefits:


- Allows easy insertion and removal.
- Flush with the wall.
- Allows easy maintenance access.
- Includes depth calibration mechanism and a spacer allowing installation in wide range of board thicknesses:  
With spacer: 10.3mm ~ 23.5mm [0.4" ~ 0.93"] thick.  
Without spacer 21.9mm ~ 36mm [0.86" ~ 1.38"] thick.
- Use routing template as spacer.
- Designed for the use with Crestron HZ2-FP-G4 faceplate with **low voltage** Horizon™ devices only (faceplate and devices not included).

#### Installation kit contains:

1. Wall adapter (x1)
2. keypad adapter (x1)
3. Routing template (x1)
4. ST3x40 screws (x4)
5. CS M3X12 Screws (x8)
6. M3 Nuts (x8)


#### Key properties:

- Dimensions (W/H/D): 248.8mm (9.8")/ 152.8mm (6.02")/ 39.5mm (1.56")
- Power Supply: None (manual adapter).
- Weight: 0.6Kg, 1.32lbs.
- Material: Moisture resistant MDF

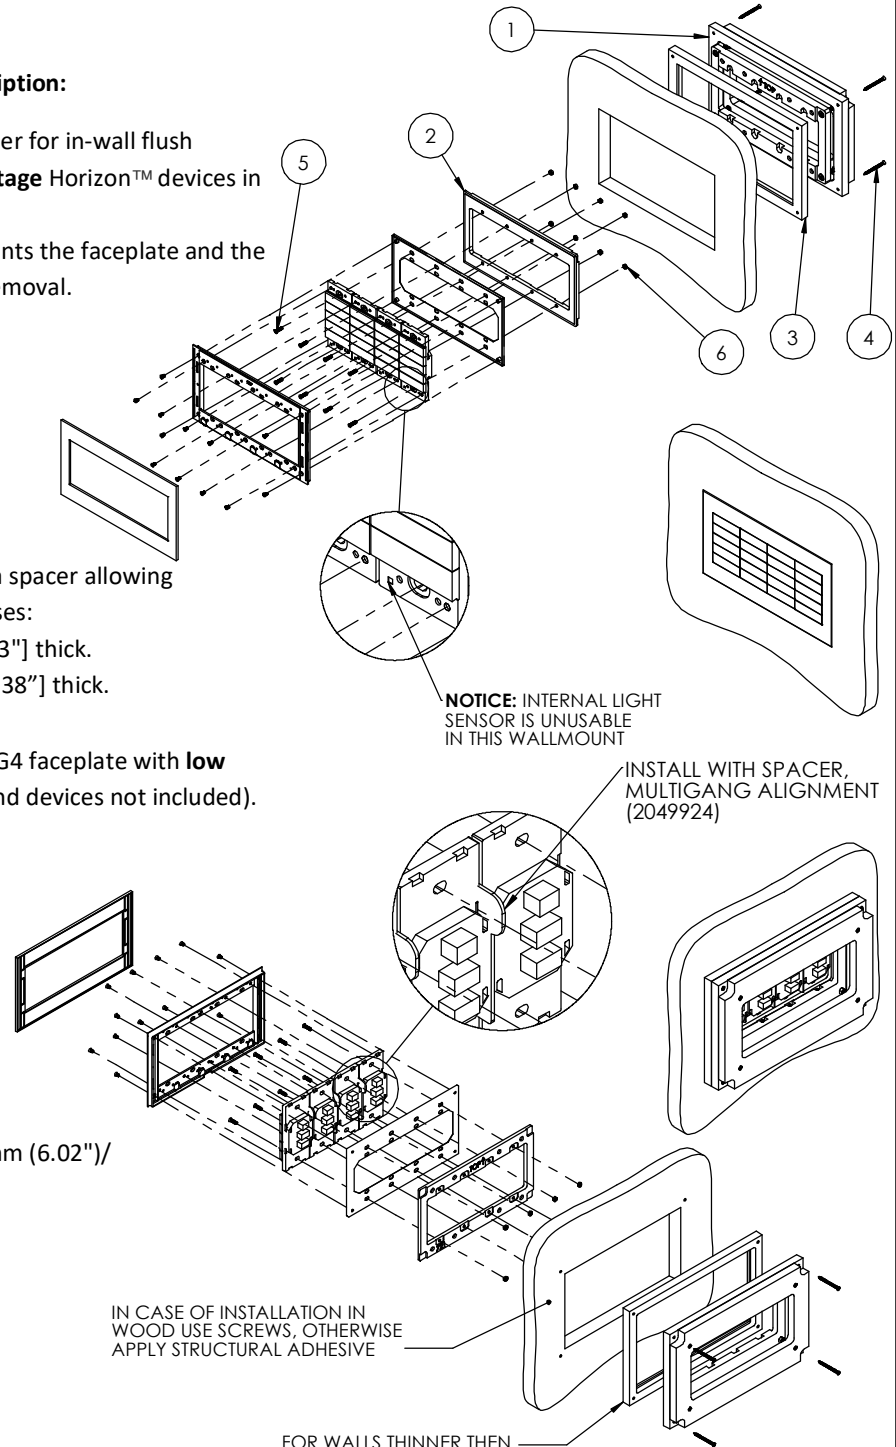


SOLID BOARD THICKNESS RANGE:  
10.3 ~ 23.5 [0.4" ~ 0.93"] WITH SPACER  
21.9 ~ 35.1 [0.86" ~ 1.38"] WITHOUT SPACER

FRONT SURFACE OF SOLID BOARD



[1.56]  
39.5

DEPTH CALIBRATION SCREWS



PUSH TO OPEN

**PRINT THIS PAGE 1:1 SCALE**

MARK SCREW  
LOCATIONS

