



Model: WS RETROFIT FOR IPAD PRO 12.9 5&6 & AIR 13M2  
BLACK / WHITE / UNPAINTED

Family: WALL-SMART

DWG NO. 002-4-858-SPC



Model No.: 002-1-858-BL / -WH / -WO

PRODUCT SPEC.

REVISION C

DATE 26/MAY/2024

**Make Your Wall Smart**

**“WS RETROFIT FOR IPAD PRO 12.9 5&6 & AIR 13M2” - Product description:**

The “WS RETROFIT FOR IPAD PRO 12.9 5&6 & AIR 13M2” is an adapter for in-wall nearly flush retrofit installation of iPad Pro 12.9 5<sup>th</sup> & 6<sup>th</sup> Gen. & iPad Air 13” M2.

The “WS RETROFIT FOR IPAD PRO 12.9 5&6 & AIR 13M2” firmly mounts the iPad while allowing easy insertion, removal and operation.



**Key features and benefits:**

- Nearly flush with the wall (4mm [0.16"] thick on-wall bezel).
- Wall mount may be mounted in any orientation.
- Designed for the use with iPad Pro 12.9” 5<sup>th</sup> & 6<sup>th</sup> Gen (by Apple) (iPad is not included).
- Adapter kit contains:
  1. Wall adapter (X1)
  2. Bezel (X1)
  3. USB-C / USB-C 90deg adaptor (X1)
- The bezel is supplied painted black (-BL), white (-WH) or unpainted (-WO).

**Key properties:**

- Dimensions: (W/H/D): 347.5mm (13.68")/ 268.8mm (10.58")/ 42.6mm (1.68")
- Power Supply: Wall mount includes POE to USB-C converter. The installer should connect the wall mount to an IEEE 802.3at POE+ power source via CAT6 cable and RJ45 connector. (Please verify the POE+ power source can supply 25.5W)
- Standard mounts supplied with charging only. In case Ethernet connectivity required, Please verify availability of SKU# 002-1-858E-BL / -WH / -WO.
- Weight: 2.8Kg, 6.16lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI)

iPad® is a trademark of Apple Inc., registered in the U.S. and other countries.

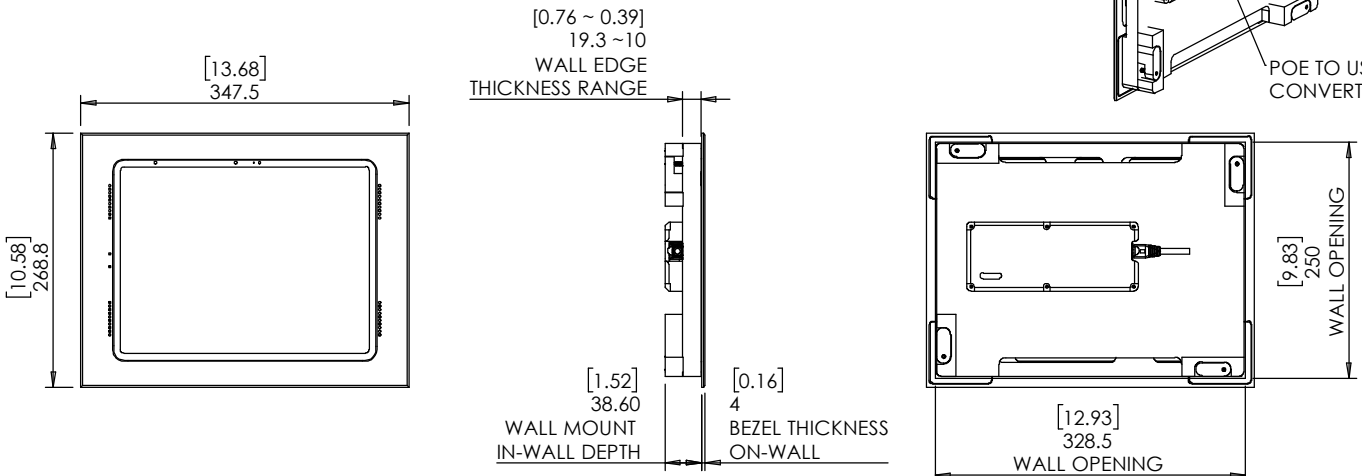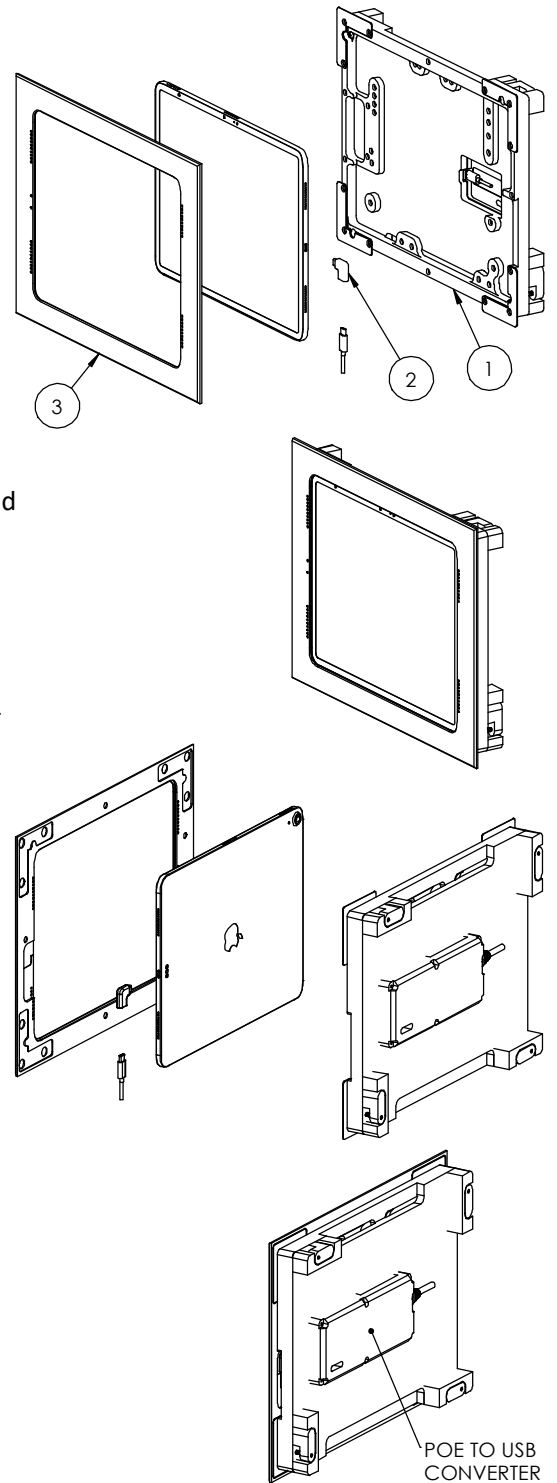




Model: WS RETROFIT FOR IPAD PRO  
12.9 5&6 & AIR 13M2  
BLACK / WHITE / UNPAINTED

Family: WALL-SMART  
DWG NO. 002-4-858-SPC





Model No.: 002-1-858-BL / -WH / -WO

PRODUCT SPEC.  
REVISION C  
DATE 26/MAY/2024



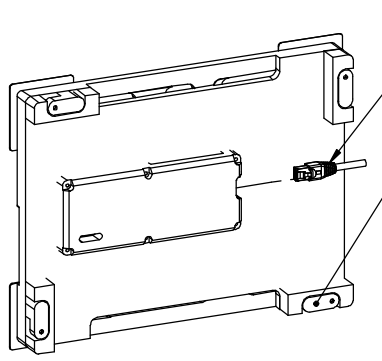


Before installation of the wall mount, connect a 48V IEEE 802.3at POE+ power source via a CAT6 cable and RJ45 connector to the POE to USB converter.


Board thickness 10mm[0.39"] up to 21mm[0.83"].  
For boards up to 32mm[1.25"] thick, reinstall cam latches upside down

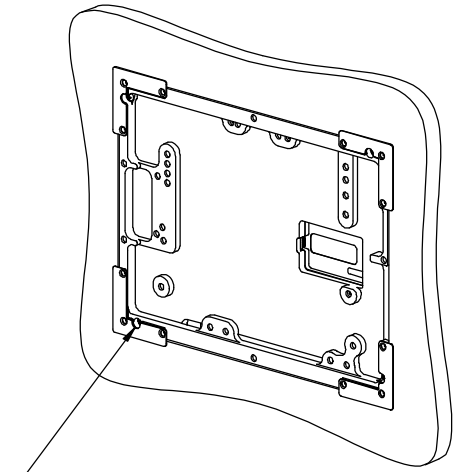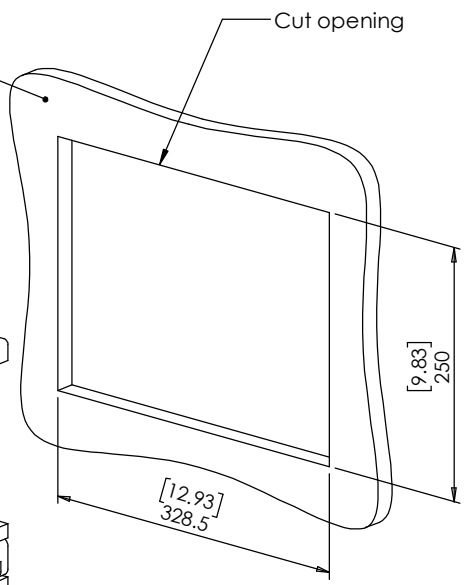

Insert wall mount and gently screw clockwise 4 retention screws until the cam latches retain the unit.

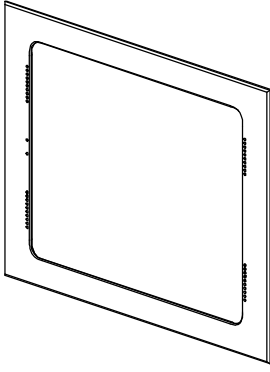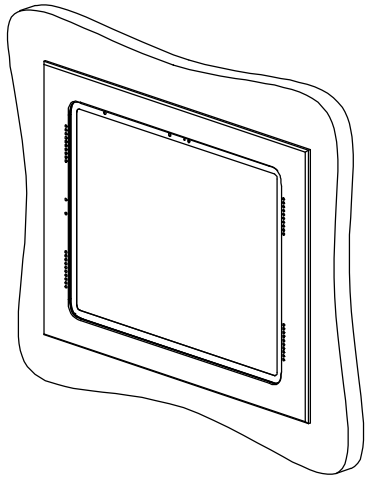

Connect USB-C/USB-C 90° adaptor and the iPad USC-C cable to the iPad

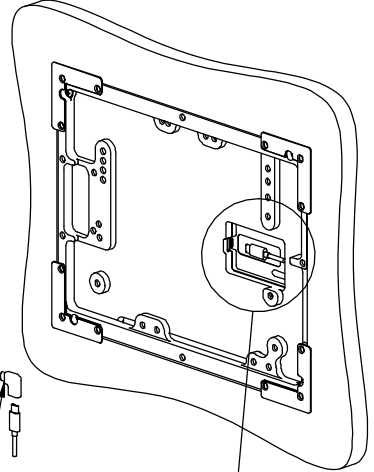

Connect iPad USB-C cable to POE to USB converter

Hide excess cable in the cable-slit

