



Model: WS FOR PIMA RXN-800

Family: WALL-SMART

DWG NO. 10-04-628-SPC



Model No.: 10-01-628

PRODUCT SPEC.

REVISION A

DATE 20/Nov./2016

**Make Your Wall Smart**


**WS FOR PIMA RXN-800 - Solid surface - Product description:**

The "WS FOR PIMA RXN-800" is an adapter for in-wall flush installation of a Pima RXN-800 keypad.

The "WS FOR PIMA RXN-800" securely mounts the keypad while allowing easy access, insertion and removal.

**Key features and benefits:**

- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Allows easy insertion and removal of the keypad by manual push and magnet detachment.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in 1/2" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in <http://www.wall-smart.com/faq>
- For installation in concrete/block wall use "WS concrete box 224x194" P/N 10-01-638 (sold separately) according installation instruction 10-04-00103-INS in <http://www.wall-smart.com/faq>
- Designed for the use with RXN-800 keypad (by Pima) (frame and keypad are not included).
- Adapter kit contains:
  1. Wall adapter;
  2. Keypad adapter;
  3. (X3) M3x12 screws
  4. (X3) M3 nuts

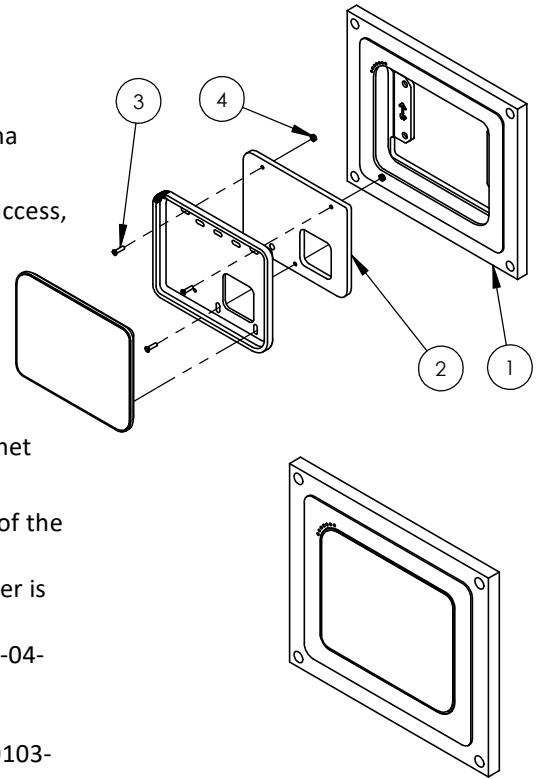

**Key properties:**

- Dimensions (W/H/D): 223.2mm (8.79")/ 193.2mm (7.61")/ 27.6mm (1.09")
- Power Supply: None (manual adapter).
- Weight: 0.42Kg, 0.924lb.
- Material: Moisture resistant MDF
- To be installed in 1/2" drywall (for installation in 5/8" drywall use 1/8" shim pack P/N 10-01-067 (sold separately)).

