

Model: WS NC FOR CRESTRON HZ2-KPCN

Family: WALL-SMART

DWG NO. 012-4-252-SPC

2

LIGHT SENSOR ORIFICE.

COMPOUND AND PAINT

KEEP CLEAR FROM DRYWALL

PRODUCT SPEC.

3

REVISION DATE 16/APR./2023



# **Make Your Wall Smart**

## WS NC FOR CRESTRON HZ2-KPCN - Product description:


The "WS NC FOR CRESTRON HZ2-KPCN" is an adapter for in-wall flush installation of an HZ2-KPCN faceplate with **low voltage** Horizon™ device. The "WS NC FOR CRESTRON HZ2-KPCN" firmly mounts the faceplate and the device while allowing easy access, insertion and removal.

Model No.: 012-1-252

#### FOR LOW VOLTAGE USE ONLY!

### Key features and benefits:


- Flush with the wall.
- Includes depth calibration mechanism.
- Paintable with the wall paint in any color and texture.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in 1/2" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wallsmart.com/faq



- Designed for the use with Crestron HZ2-KPCN faceplate with low voltage Horizon™ devices only (faceplate and devices not included).
- Adapter kit contains:
  - 1. Wall adapter(X1)
  - 2. Device adapter(X1)
  - 3. CS M3x12 screws(X2)
  - 4. M3 nuts(X2)

### **Key properties:**

- Dimensions (W/H/D): 160mm (6.30")/ 200mm (7.87")/ 44mm (1.73")
- Power Supply: None (manual adapter).
- Weight: 0.5Kg, 1.1lbs.
- To be installed in ½" drywall (for installation in 5/8" drywall use 1/8" shim pack P/N 10-01-067 (sold separately)).

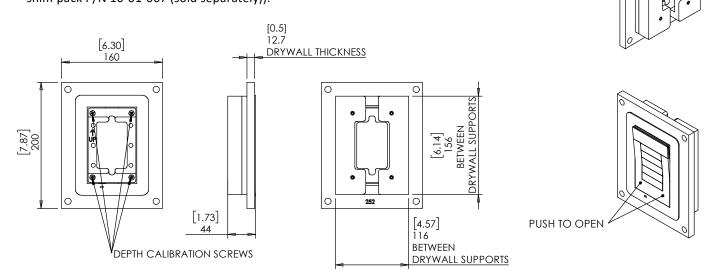

by Wall-Smart

LINLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART ©

SHEET 1/1

Phone: (201) 205-2056 / info@wall-smart.com www.wall-smart.com