



Model: WS NC FOR VANTAGE EasyTouch 2G keypad

Family: WALL-SMART

DWG NO. 033-4-916-SPC



Model No.: 033-1-916

PRODUCT SPEC.

REVISION A

DATE 15/SEP/2022

**Make Your Wall Smart**


**WS NC FOR VANTAGE EasyTouch 2G KEYPAD- Product description:**

The “WS NC FOR VANTAGE EasyTouch 2G KEYPAD” is an adapter for in-wall flush installation of a Vantage EasyTouch 2G keypad.

The “WS NC FOR VANTAGE EasyTouch 2G KEYPAD” firmly mounts the keypad while allowing easy access, insertion and removal.

**Key features and benefits:**

- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Includes depth calibration mechanism.
- The adapter is supplied unpainted (To be painted after Installation as part of the wall).
- Designed to be installed in 1/2” drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in <http://www.wall-smart.com/faq>
- For installation in concrete/brick wall use “WS Concrete Box 186x186” P/N 100-1-918 (sold separately) according installation instruction 10-04-00103-INS in <http://www.wall-smart.com/faq>
- Designed for the use with VANTAGE EasyTouch 2G KEYPAD. (keypad not included)
- Adapter kit contains:
  1. (X1) Wall adapter
  2. (X4) M3 nuts
  3. (X1) Keypad adapter
  4. (X4) M3x12 screws

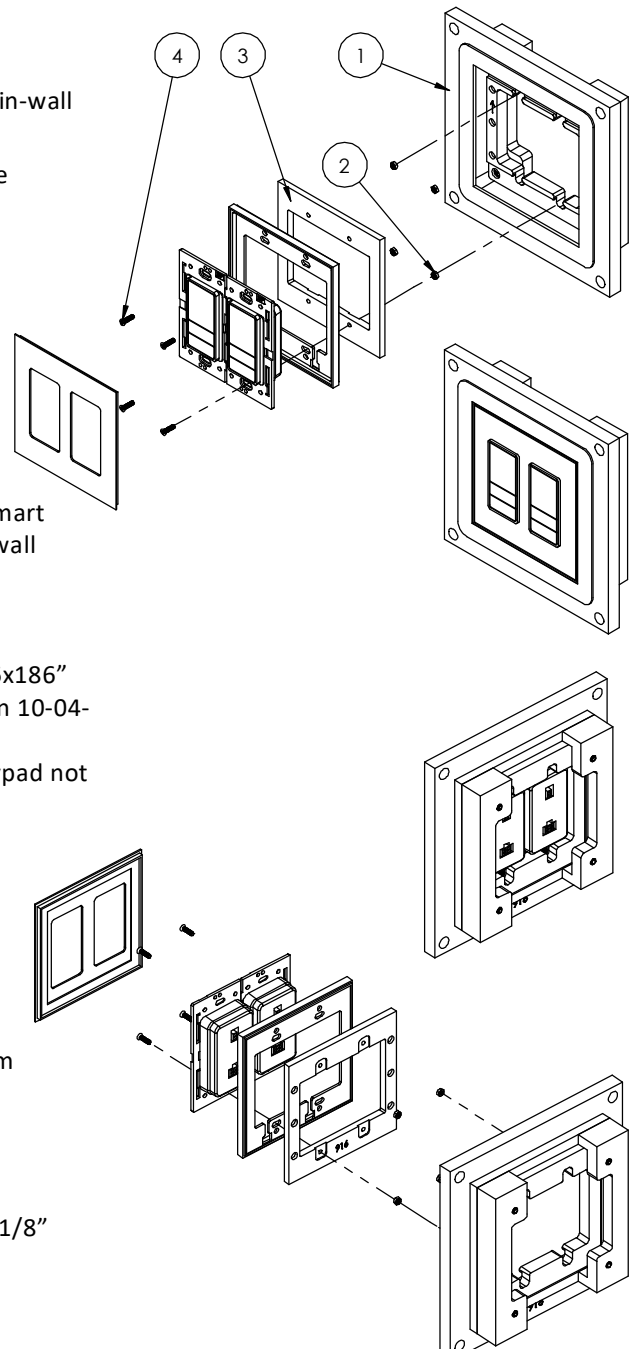

**Key properties:**

- Dimensions (W/H/D): 184.2mm (7.25")/ 184.2mm (7.25")/ 44mm (1.73").
- Power Supply: None (manual adapter).
- Weight: 0.54Kg, 1.19lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI).
- To be installed in 1/2” drywall (for installation in 5/8” drywall use 1/8” shim pack P/N 10-01-067 (sold separately)).

