



Model: WS SB FOR LUTRON ALISSE 3C

Family: WALL-SMART

DWG NO. 058-4-881-SPC

Model No.: 058-4-881

PRODUCT SPEC.

REVISION A

DATE 30/MAR/2021



Make Your Wall Smart

“WS SB FOR LUTRON ALISSE 3C” - Product description:

The “WS SB FOR LUTRON ALISSE 3C” is an adapter for in-wall flush installation of a LUTRON Alisse wall control triple column in solid board walls.


The “WS SB FOR LUTRON ALISSE 3C” firmly mounts the keypad allowing easy access, insertion and operation.

Key features and benefits:


- Allows easy insertion and removal.
- Flush with the wall.
- Allows easy maintenance access.
- Includes depth calibration mechanism and a spacer.
- allowing installation in wide range of board thicknesses:
With spacer: 6.0mm ~ 22.0mm [0.23" ~ 0.86"] thick.
Without spacer 17.0mm ~ 34.2mm [0.67" ~ 1.34"] thick.
- Designed for the use with Alisse wall control 3C (by Lutron©) (not included).
- Use routing template as spacer.
- Installation kit contains:
 1. Wall adapter (x1)
 2. keypad adapter (x1)
 3. Routing template (x1)
 4. ST3x40 screws (x4)
 5. M3X12 Screws (x2)
 6. M3 Nuts (x2)

Key properties:



- Dimensions (W/H/D): 123.4mm (4.86")/ 155.6mm (6.12")/ 43.0mm (1.69")
- Power Supply: None (manual adapter).
- Weight: 0.6Kg, 1.32lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI)

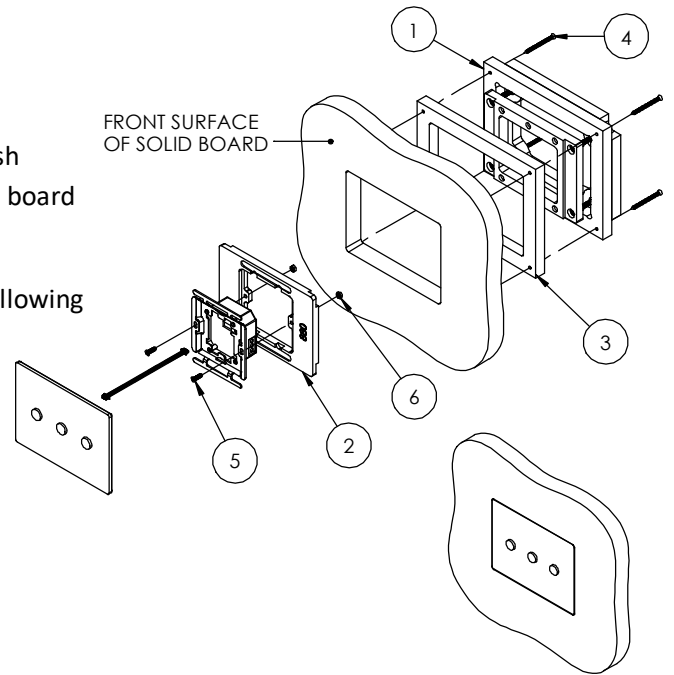

IN CASE OF INSTALLATION IN WOOD USE SCREWS, OTHERWISE APPLY STRUCTURAL ADHESIVE

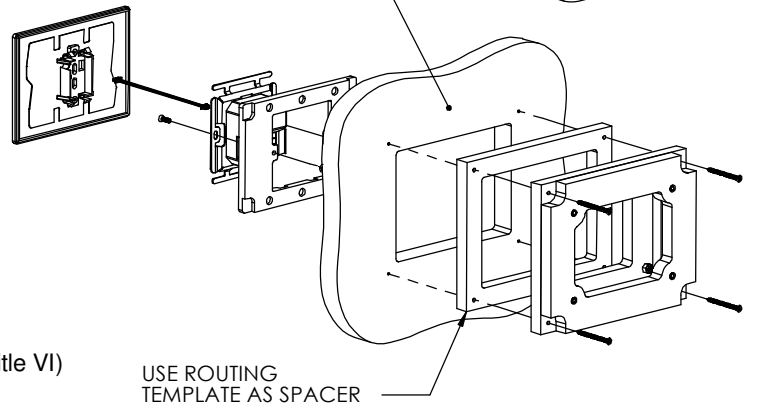

SOLID BOARD THICKNESS RANGE:
6.0 ~ 22.0 [0.23~0.86] WITH SPACER
17.0 ~ 34.2 [0.67~1.34] WITHOUT SPACER

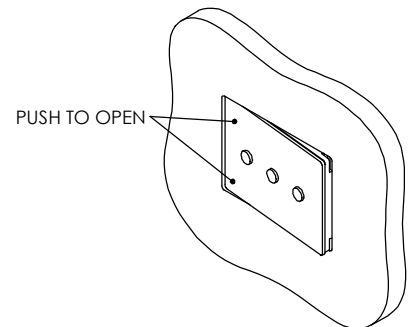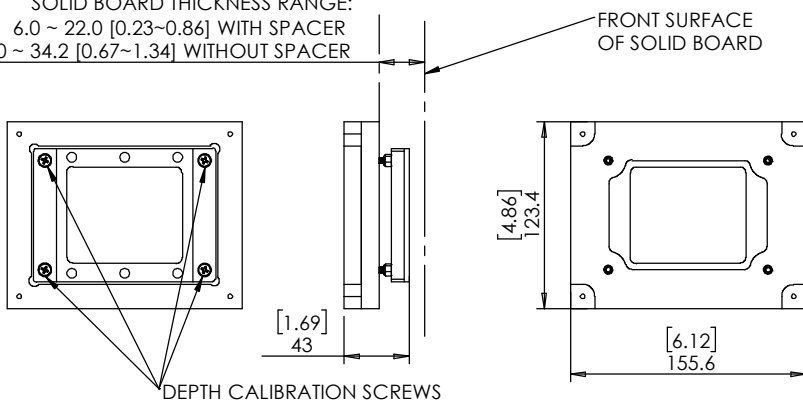



Model: WS SB FOR LUTRON ALISSE 3C

Family: WALL-SMART

DWG NO. 058-4-881-SPC

Model No.: 058-1-881

PRODUCT SPEC.


REVISION A

DATE 30/MAR/2021



CUTOUT ROUTING TEMPLATE 058-1-881

SCALE 1:1

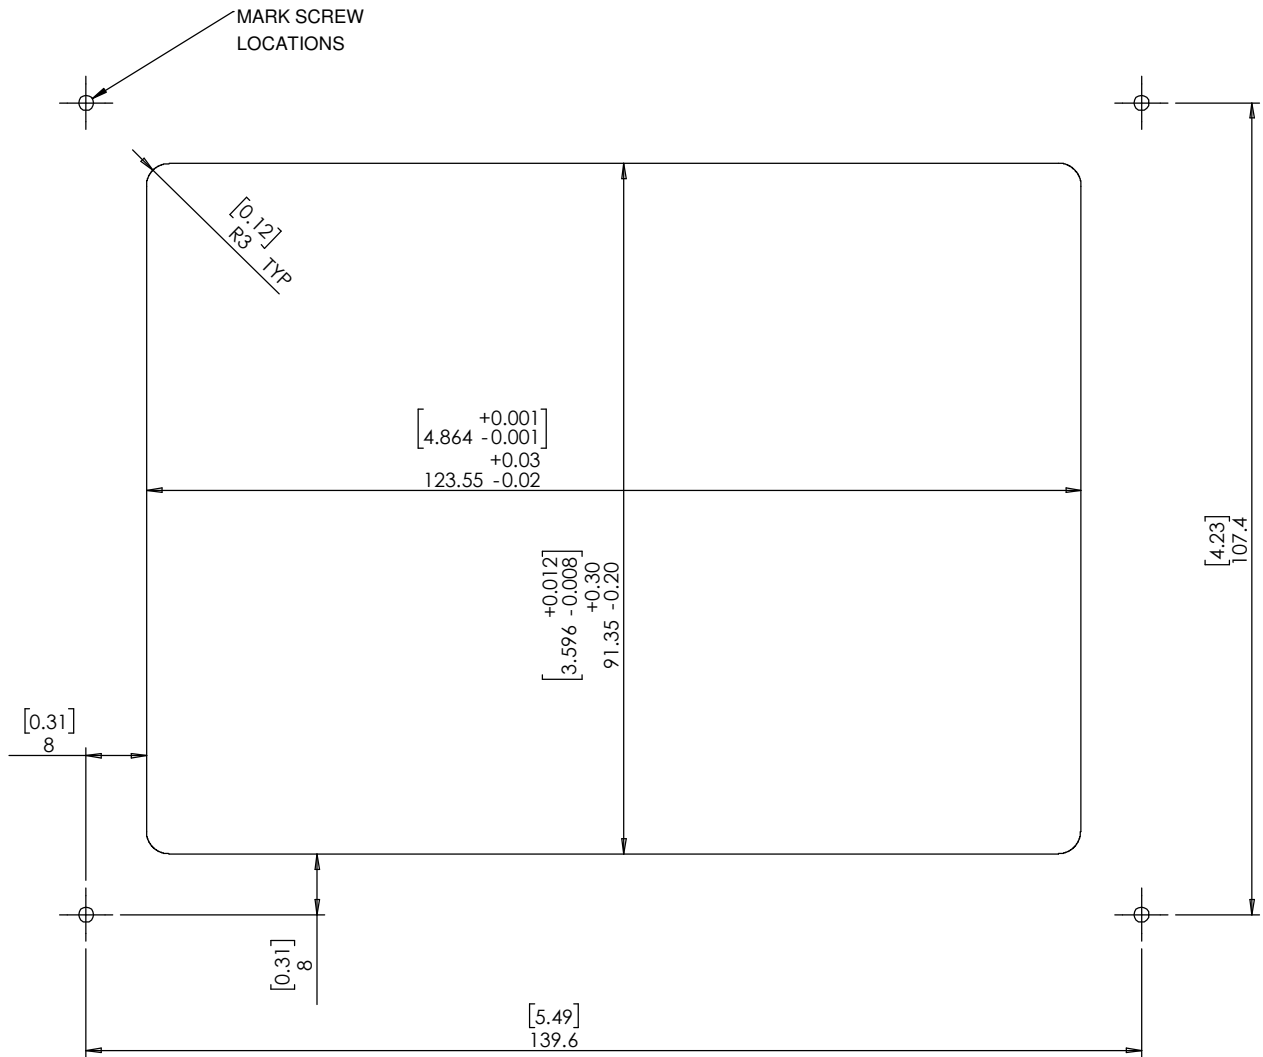

PRINT THIS PAGE 1:1 SCALE