

Model:

WS NC FOR BLACK NOVA 2MODULE LOW V

084-1-921

Family:

WALL-SMART

DWG NO. 084-4-921-SPC

PRODUCT SPEC.

REVISION

DATE 8/DEC./2022



Make Your Wall Smart

"WS NC FOR BLACK NOVA 2MODULE LOW V" - Product description:

The "WS NC FOR BLACK NOVA 2MODULE LOW V" is an adapter for in-wall flush installation of a Black Nova 2 module low voltage devices.


The "WS NC FOR BLACK NOVA 2MODULE LOW V" firmly mounts the device while allowing easy access, insertion and operation.


Key features and benefits:


- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Allows easy insertion and removal of the faceplate and accessories.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in ½" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wallsmart.com/fag
- Designed for the use with 2module devices (by Black Nova) (Black Nova devices are not included).
- Adapter kit contains:
 - 1. Wall adapter (x1)
 - 2. Device adapter (x1)
 - 3. M3 nuts (x8)
 - 4. M3x12 flat screws (x8)


Key properties:


- Dimensions (W/H/D): 263mm (10.35")/ 163mm (6.42")/ 44mm (1.73")
- Power Supply: None (manual adapter).
- Weight: 0.5Kg, 1.10lbs.
- Material: Moisture resistant MDF.
- To be installed in ½" drywall (for installation in 5/8" drywall use 1/8" shim pack P/N 10-01-067 (sold separately)).

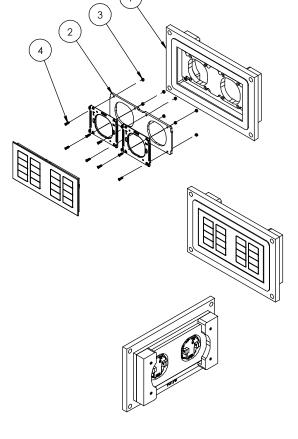

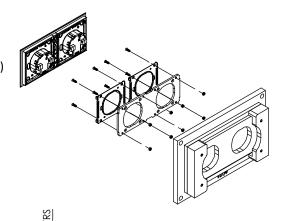



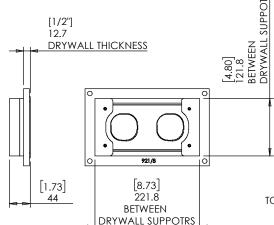



by Wall-Smart

LINLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART ©