

Model: WS for 5" Touch Panel GVS/K-BUS

Family:

WALL-SMART

DWG NO. 10-04-155-SPC

PRODUCT SPEC.

REVISION

DATE 01/May/2014

Make Your Wall Smart

WS for 5" Touch Panel GVS/K-BUS - Product description:

Model No.: 10-01-155

The "WS for 5" Touch Panel GVS/K-BUS" is an adapter for in-wall flush installation of a CHTF-05/01.1 touch panel.


The "WS for 5" Touch Panel GVS/K-BUS" securely mounts the touch panel while allowing easy access, insertion and removal.


Key features and benefits:

- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Allows easy insertion and exertion of the keypad by manual push and magnet detachment of the keypad tray.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in 1/2" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wallsmart.com/faq
- For installation in concrete/block wall use "WS Concrete Box 217x162" P/N 10-01-162 (sold separately) according installation instruction 10-04-00103-INS in http://www.wall-smart.com/faq
- Designed for the use with CHTF-05/01.1 touch panel (by GVS) (touch panel not included).
- Adapter kit contains:
 - X1 Wall adapter (item 2)
 - X1 Keypad adapter (item 1)
 - X4 M3 Screw (item 4)
 - X4 M3 Nut (item 3)

Key properties:

- Dimensions (W/H/D): 162.3mm (6.4")/ 217.2mm (8.5")/ 22mm (0.87")
- Power Supply: None (manual adapter).
- Weight: 0.39Kg, 0.86lbs.

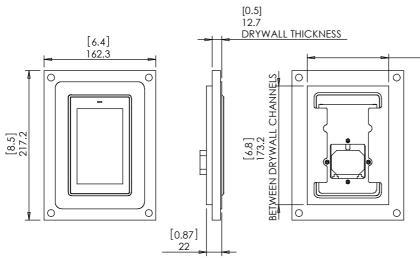

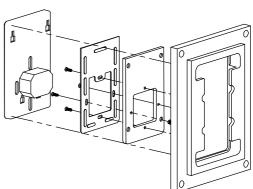

BETWEEN DRYWALL CHANNELS

[4.7]

118.3



by Wall-Smart www.wall-smart.com UNI ESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART **©**

SHEET 1/1