

Model: WS for HomeWorks® QS Insert Wired

seeTouch® - Triple Gang

Family: **WALL-SMART**

DWG NO. 10-04-224-SPC

PRODUCT SPEC.

REVISION

DATE Aug./30/2014

Make Your Wall Smart

WS for HomeWorks® QS Insert Wired seeTouch® keypad - Triple Gang -**Product description:**

Model No.: 10-01-224

The "WS for HomeWorks® QS Insert Wired seeTouch® - Triple Gang" is an adapter for in-wall flush installation of three HomeWorks® QS Insert Wired seeTouch® keypads.

The "WS for HomeWorks® QS Insert Wired seeTouch® - Triple Gang" securely mounts the keypads while allowing easy access, insertion and operation.


Key features and benefits:


- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Allows easy insertion and removal of the keypad by manual push and magnet detachment of the keypad tray.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in ½" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wallsmart.com/faq
- Designed for the use with HomeWorks® QS Insert Wired seeTouch® keypads (by Lutron©) (keypads not included).
- Adapter kit contains:
 - 1. Wall adapter;
 - 2. Keypad adapter;
 - 3. (12x) ST2.9 Screw;
 - 4. (6x) Retainer;

Key properties:

- Dimensions (W/H/D): 186mm (7.32")/ 209.5mm (8.25")/ 16.6mm (0.65")
- Power Supply: None (manual adapter).

Weight: 0.41Kg, 0.9lbs. 12.7 To be installed in 1/2" drywall.

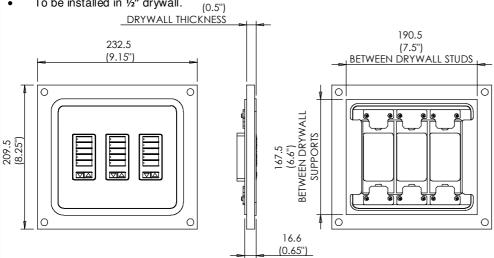

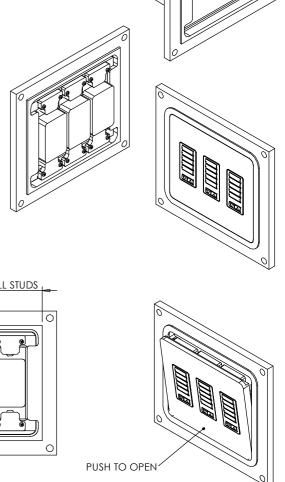

by Wall-Smart

UNI ESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART **©**

SHEET 1/1