

Model: WS NC FOR Basalte Auro

Family: WALL-SMART

DWG NO. 10-04-468-SPC

PRODUCT SPEC.

\_\_\_\_\_

REVISION

DATE 05/AUG./2015



## **Make Your Wall Smart**

## "WS NC FOR Basalte Auro" - Product description:

Model No.: 10-01-468

The "WS NC FOR Basalte Auro" is an adapter for in-wall flush installation of Basalte Auro motion detector.


The "WS NC FOR Basalte Auro" firmly mounts the motion detector while allowing easy insertion and removal.


## Key features and benefits:


- Flush with the wall.
- Paintable with the wall paint in any color and texture.
- Allows easy insertion and removal of the motion detector.
- The adapter is supplied unpainted (To be painted after installation as part of the wall).
- Designed to be installed in ½" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in <a href="http://www.wall-smart.com/faq">http://www.wall-smart.com/faq</a>
- For installation in concrete/block wall use "WS Concrete Box 142x142" P/N 10-01-112 (sold separately) according installation instruction 10-04-00103-INS in http://www.wall-smart.com/faq
- Designed for the use with Basalte Auro motion detector (motion detector is not included).
- Adapter kit contains:
  - 1. Wall adapter;
  - 2. (x4) ST3.5x8 screws;


## **Key properties:**

- Dimensions (W/H/D): 142mm (5.59")/ 142mm (5.59")/ 16.6mm (0.65")
- Power Supply: None (manual adapter).
- Weight: 0.25Kg, 0.55lbs.
- Material: Moisture resistant MDF
- To be installed in ½" drywall (for installation in 5/8" drywall use 1/8" shim pack P/N 10-01-067 (sold separately)).



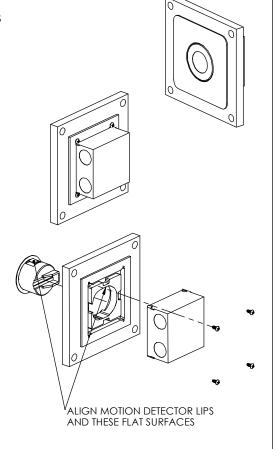





PUSH TO OPEN

by Wall-Smart Ltd. www.wall-smart.com

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART **©**