

WS NC FOR MICROSOFT Model:

SURFACE GO 2

064-1-432

Family: WALL-SMART

DWG NO. 064-4-432-SPC

POSITION WALL-SMART KEY TO OPEN

PRODUCT SPEC.

DATE 13/FFB/2022



Make Your Wall Smart

WS NC FOR MICROSOFT SURFACE GO 2- Product description:

Model No.:

The "WS NC FOR MICROSOFT SURFACE GO 2" is an adapter for in-wall use of a MICROSOFT SURFACE GO 2" tablet as a control device for Smart home/office/public institutes. The "WS NC FOR MICROSOFT SURFACE GO 2" securely mounts the tablet allowing easy access, insertion and removal.

Key features and benefits:

Flush with the wall.

MICROSOFT USB-C® TRAVEL HUB HOLDER-

(37.4'')

 ϕ 5.5 (Ø0.216"

> Ø2.1 (**Ø**0.082'') 2.1x5.5mm DC Power Fem Plug Connector Inline

OVERALL THICKNESS

[2.39] 60.7

- Microsoft surface go 2 mounted horizontally (landscape position)
- Camera and microphone are covered.
- Paintable with the wall paint in any color and texture.
- Easy to operate. Electrically locked/unlocked by positioning of the Wall-Smart key over top right door corner (Wall-Smart key included). After unlocking, door manually opened to insert /remove tablet.
- Internal surfaces painted black.
- External surfaces (front panel) are unpainted. To be painted after installation as part of the wall. The adapter is supplied with a paint masking plug.
- Electric lock power supply (12VDC, 0.28A) via power cord attached. (power supply not included)
- Designed to be installed in 1/2" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wall-smart.com/faq
- For installation in concrete/block wall use "WS Concrete Box 406x364" P/N 10-01-048 (sold separately) according installation instruction 10-04-00103-INS in http://www.wall-smart.com/faq
- Designed for the use with surface go 2 tablet and USB-C travel hub (by Microsoft) (tablet and hub not included)
- Adapter kit contains:
 - 1. (X1) Wall adapter
 - 2. (X1) WALL-SMART key
 - 3. (X1) USB-C 90° adapter

Key properties:

Dimensions (W/H/D): 406mm (16")/ 364mm (14.33")/ 48.3mm (2.39")


ELECTRIC CORD (12VDC,

Power Supply: 12VDC, 0.28A (not included)

POSITION WALL-SMART

Weight: 3.1Kg, 6.8lbs

KEY TO OPEN

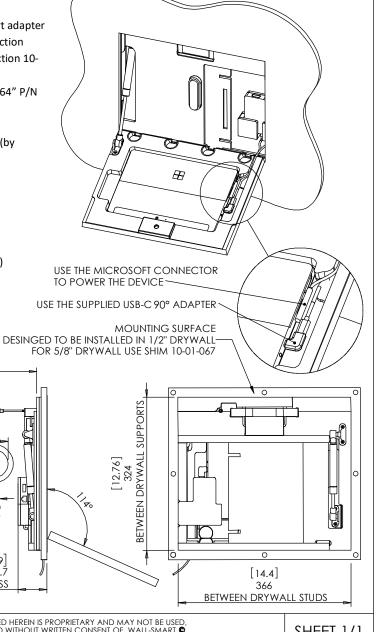



[14.33] 364

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

[16.0]

INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART **©**

SHEET 1/1