



Model: WS SB FOR CRESTRON HZ-KPCN

Family: WALL-SMART

DWG NO. 10-04-466-SPC



Model No.: 466

PRODUCT SPEC.

REVISION A

DATE 24/JUNE/2018

### Make Your Wall Smart

#### “WS SB FOR CRESTRON HZ-KPCN” - Product description:

The “WS SB FOR CRESTRON HZ-KPCN” is an adapter for in-wall flush installation of a HZ-KPCN keypad in solid board walls.




The “WS SB FOR CRESTRON HZ-KPCN” firmly mounts the touch screen while allowing easy access, insertion and removal.

#### Key features and benefits:

- Flush with the wall.
- Allows easy insertion and removal of the touch screen by manual push and magnet detachment.
- Designed to be installed in 9 ~ 37mm (0.35" ~ 1.45") thick solid boards.
- Installation adapter contains depth adjustment mechanism.
- Installation kit contain:
  - X1 routing template (item #1)
  - X1 installation adapter (item #2)
  - X4 ST3x40 screws (item #3)
  - X2 M3x12 screws (item #4)
  - X1 keypad adapter (item #5)
  - X2 M3 nuts (item #6)
- Designed for HZ-KPCN keypad (by Crestron) (keypad not included).

#### Key properties:



- Dimensions (W/H/D): 109.9mm (4.32")/ 152.1mm (5.99")/ 41.2mm (1.62")
- Power Supply: None (manual adapter).
- Weight: 0.42Kg, 0.924lbs.
- Material: Moisture resistant MDF

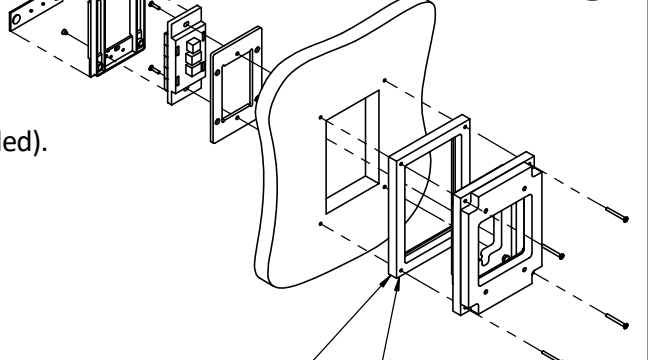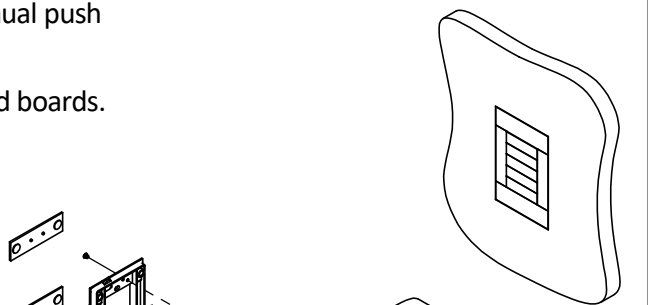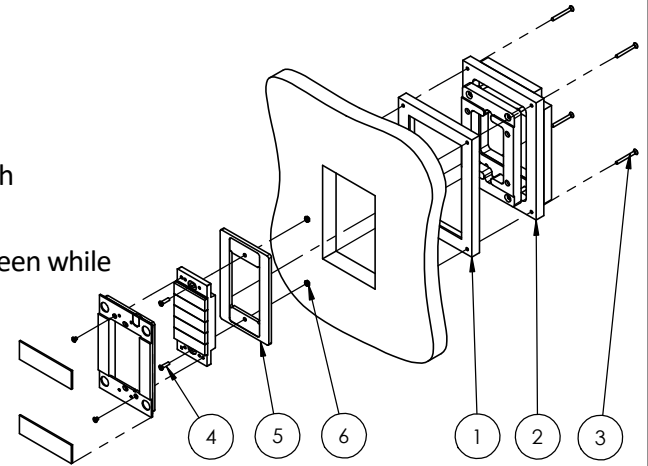

ROUTING TEMPLATE

FOR INSTALLATION IN BOARDS 9mm TO 27mm THICK  
USE ROUTING TEMPLATE AS INSTALLATION SPACER

SOLID BOARD THICKNESS RANGE:  
9 ~ 27 [0.35"~0.1.06"] WITH SPACER  
20.6 ~ 37 [0.81" ~ 1.45"] WITHOUT SPACER

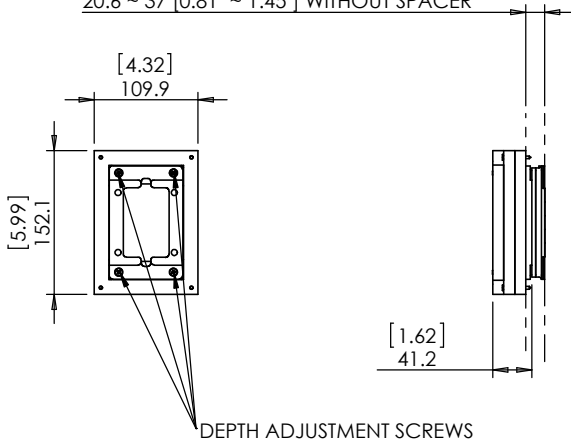

PUSH TO OPEN



Model: WS SB FOR CRESTRON HZ-KPCN

Family: WALL-SMART

DWG NO. 10-04-466-SPC

Model No.: 466

PRODUCT SPEC.


REVISION A

DATE 24/JUNE/2018



### ROUTING TEMPLATE

MARK SCREW LOCATIONS

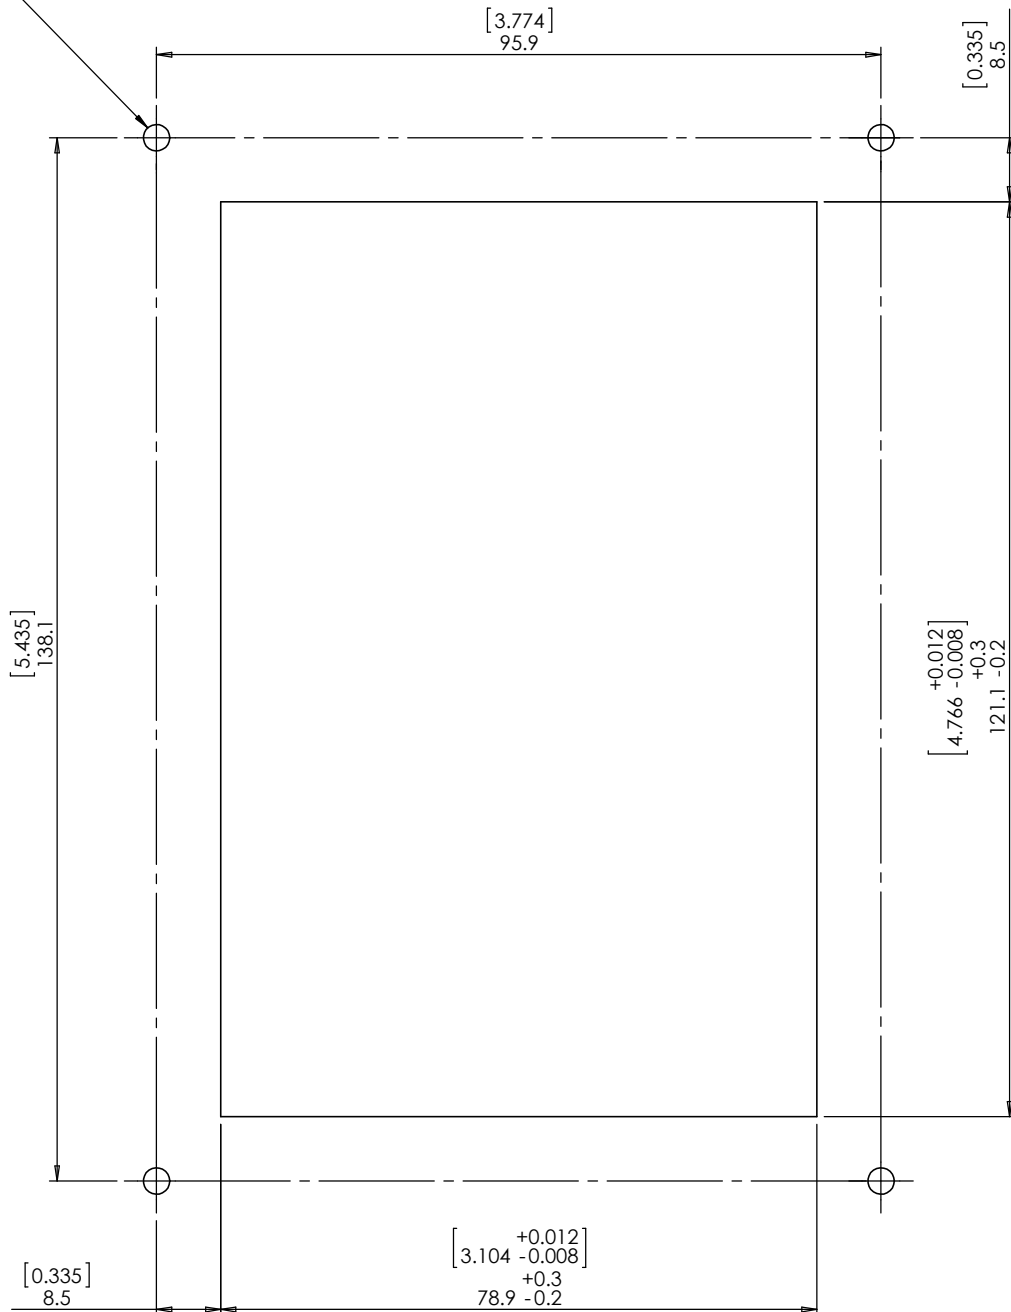

Download template DXF file:

<https://www.wall-smart.com/uploads/2/4/1/6/24165207/10-04-466-template.dxf>